




XX4702

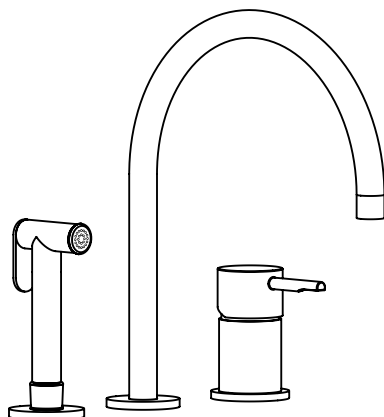







XX4102

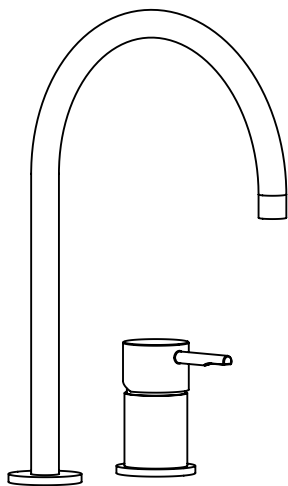

XX4003

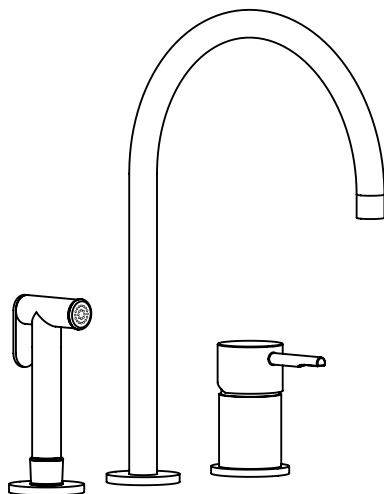

XX4103

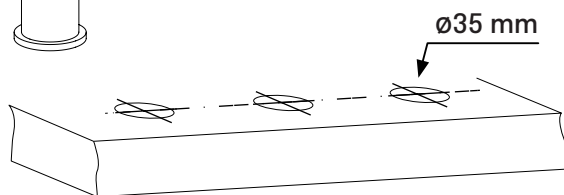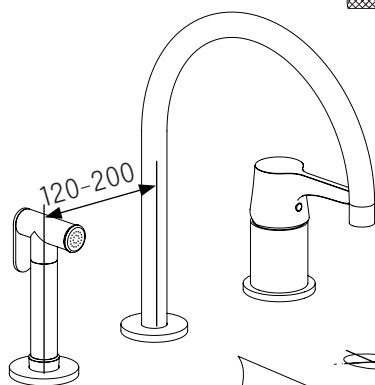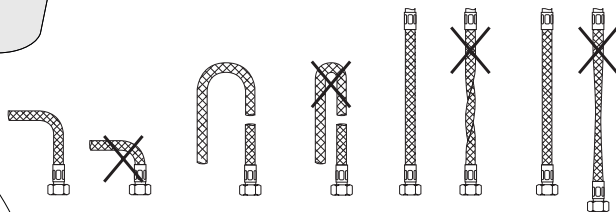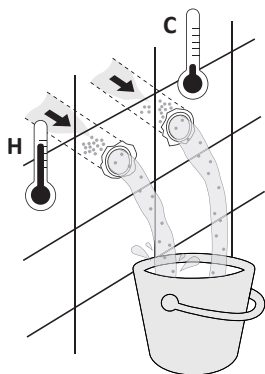

40mm max.


Technical drawing of the cable assembly showing dimensions and components. The drawing includes the following dimensions and labels:

- Overall height: 279
- Height from base to cable entry: 144
- Horizontal distance from base to cable entry: 220
- Horizontal distance from base to connector: 120-200
- Base diameter: $\varnothing 50$
- Connector diameter: $\varnothing 54$
- Base thickness: max. 40
- Base material: M32
- Connector diameter: $\varnothing 35$
- Overall height from base to connector: 476


Technical drawing of the cable assembly showing dimensions in millimeters (mm):

- Overall length: 220
- Distance from top to first connector: 280
- Distance from top to second connector: 145
- Distance from top to third connector: 120-200
- Distance between first and second connectors: max. 40
- Distance between second and third connectors: 476
- Outer diameter of cable: Ø52
- Outer diameter of first connector: Ø50
- Outer diameter of second connector: Ø35
- Outer diameter of third connector: Ø54
- Thread of first connector: M32


XX4003

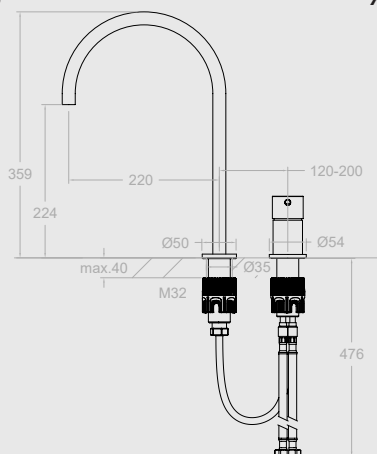

XX4103

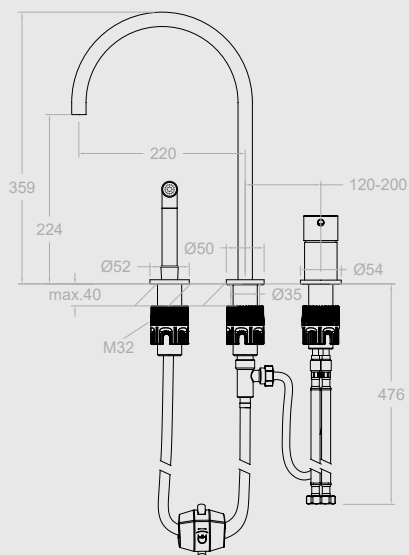

①

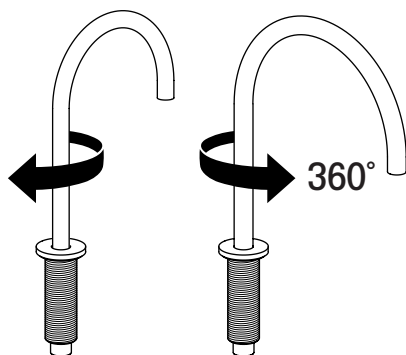


Girar el caño hasta hacer tope.

Turn the spout full lock.

Tourner le bec jusqu'à son blocage.



Den Auslauf bis zum Anschlag drehen.

②

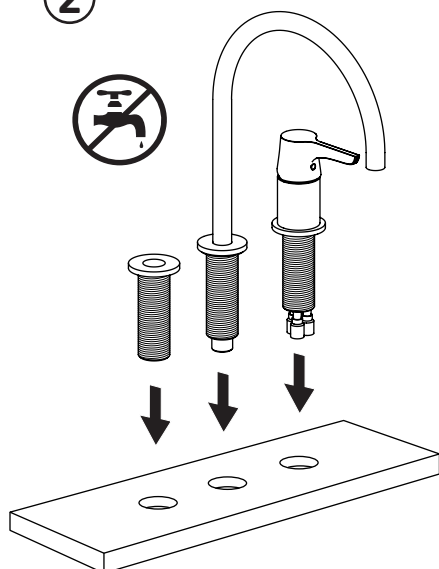


ramonsoler.


3

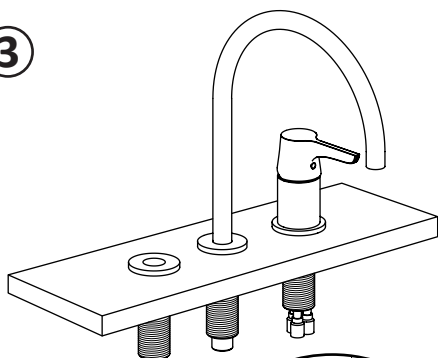

4

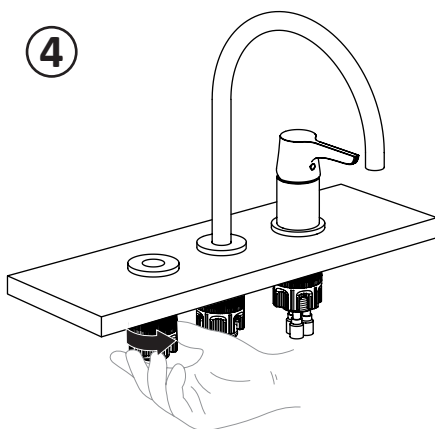


5

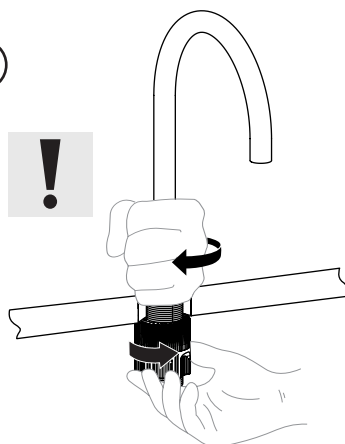


Conexión agua caliente
Hot water hose connection
Connexion du flexible d'eau chaude
Gewindebohrung Warmwasser-
Anschlusschlauch


Conexión agua fría
Cold water hose connection
Connexion du flexible d'eau froide
Gewindebohrung Kaltwasser-
Anschlusschlauch

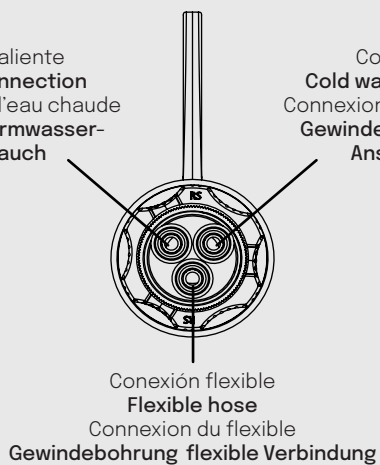


6

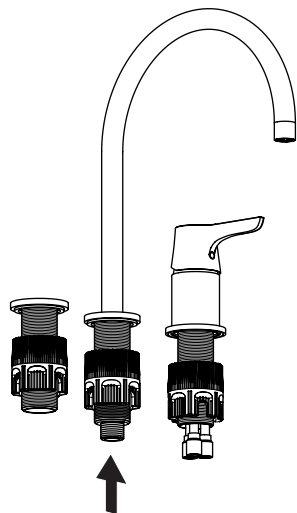


7

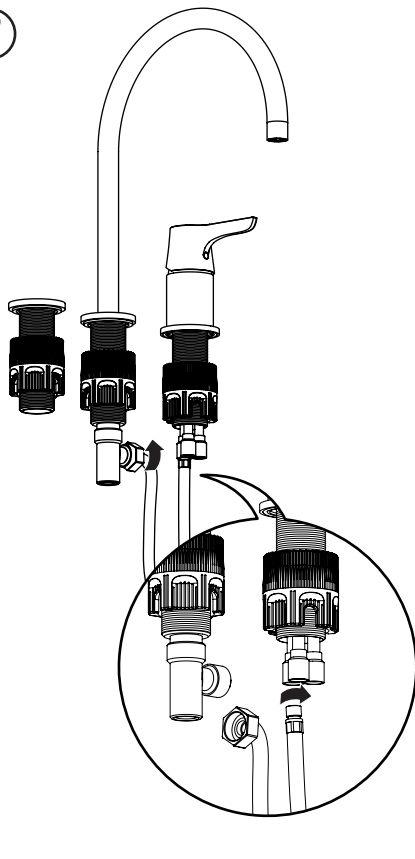

8

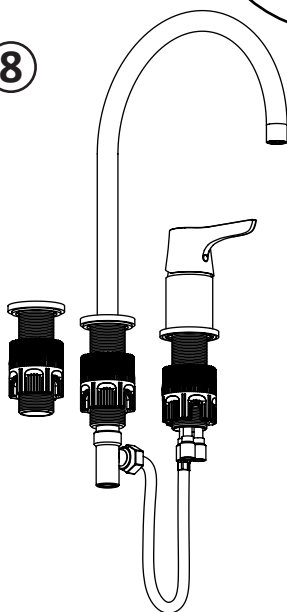


9

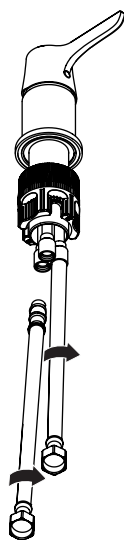


10




! STOP

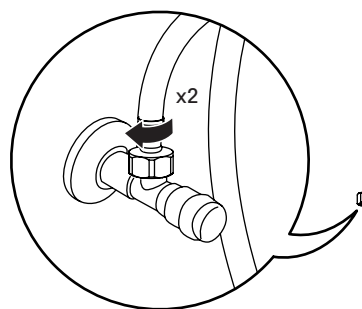

11

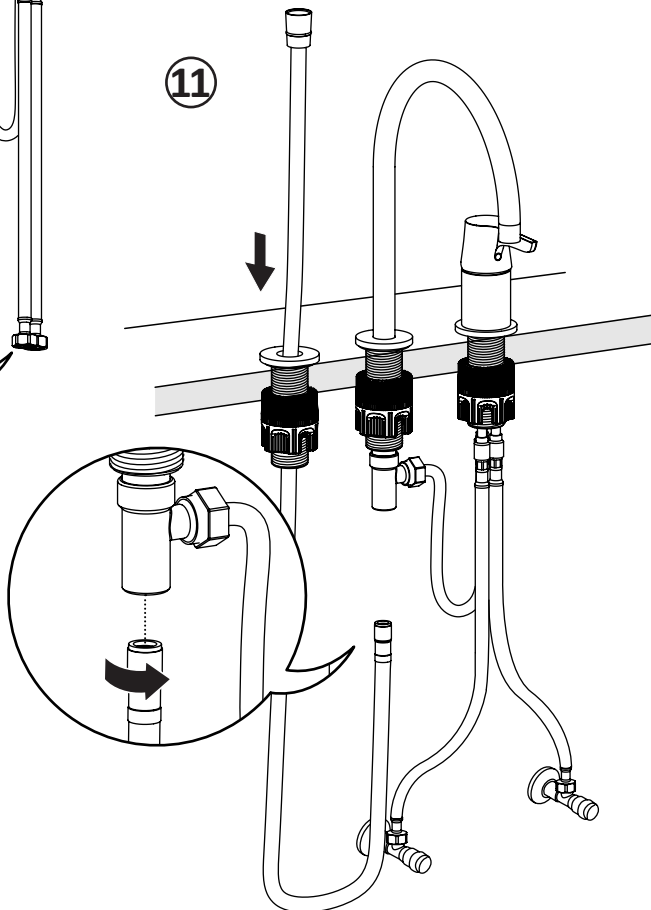

12

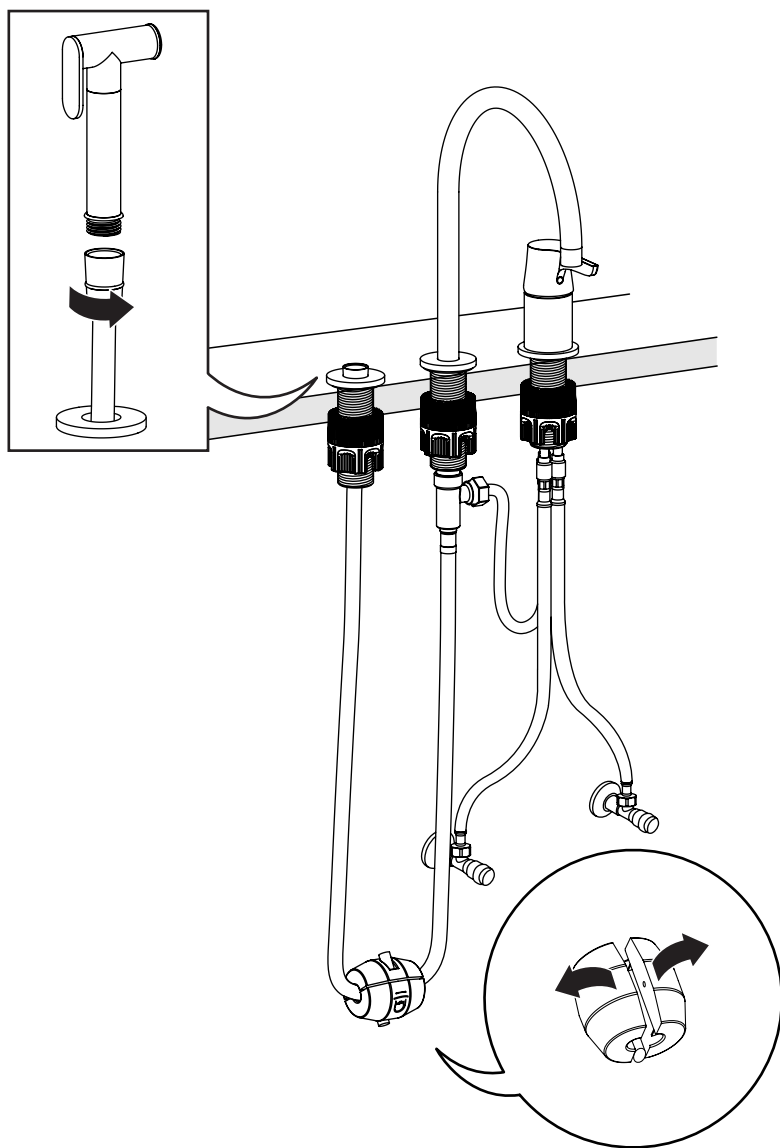

13

